



CARGO 1300TW

**INSULATED CONTAINER FOR THE
TRANSPORT OF TEMPERATURE-
CONTROLLED PRODUCTS**



www.melform.com



CARGO 1300TW

- Brand: MELFORM
- Country of origin: ITALY
- Customs code: 39231090
- External dimensions 1100x1100
- Compatible with food contact
- Color: grey/blue
- Capacity: 1350 liters.
- Technology: rotomoulding
- Warranty: 24 months
- Fully recyclable at the end of its operational life.

MANUFACTURING MATERIALS

POLYETHYLENE: inner and outer walls of container and door; suitable for food contact.

POLYURETHANE: insulating material between the walls of the container and the door, free of CFC and HCFC.

STAINLESS STEEL: handling handles, closing handle, internal door rod.

GALVANIZED STEEL: Hinge rods, hinge rod connection plates, wheel support.

SILICON RUBBER: gasket.

NYLON : wheels.

POLYPROPYLENE : Hinges.

AVAIBLE MODELS

MODEL	SKU	CODE EAN	DIM. EXT. (mm)	DIM. INT. (mm)	CAPACITY (L)	WEIGHT (kg)
Cargo 1300 TW Basic	1300T907	8022949229221	1100x1100x1780	900x910x1580	1350	145,5
Cargo 1300 TW wheels	1300T003	8022949120610	1100x1100xh1940	900x910xh1580	1350	150
Cargo 1300 TW feet	1300T009	8022949138202	1100x1100xh1905	900x910xh1580	1350	150

PRODUCT CHARACTERISTICS



Equipped with 4 wheels. diam. 125mm, two fixed, one swivel and one swivel with brake. Wheel support plate integrated in the container



Version with 4 feet in galvanized steel h 120mm



4 housing seats of grids positioned at 385/785/1185/1290mm from the bottom of the container



Stainless steel grids (on request)




Available (on request) USB datalogger to record temperature data during transport



Card holder for identification of the content or destination. Suitable for B5 format documents



Internal grooves to promote good air circulation

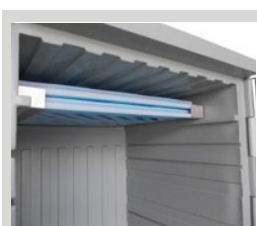

2 stainless steel seats, positioned 135mm from the roof of the container, allow the housing of 4 eutectic plates



Fresh, frozen and frozen plus eutectic plates, to increase thermal performance over time (on request)



Joint d'étanchéité de porte facilement amovible



Door can be opened up to 270° with double tab and magnetic door retainer



Stainless steel closing handle with release button and tamper-evident system



Controllable internal temperature thanks to the thermometer that can be inserted into the door (on request)



Double pin hinges. Improved stability of the door over time


°C

Guaranteed for use: **-30°C to +100°C**

K

Overall heat transfer coefficient:
K=0.33 W/m²K

DIMENSIONAL DRAWING (mm)

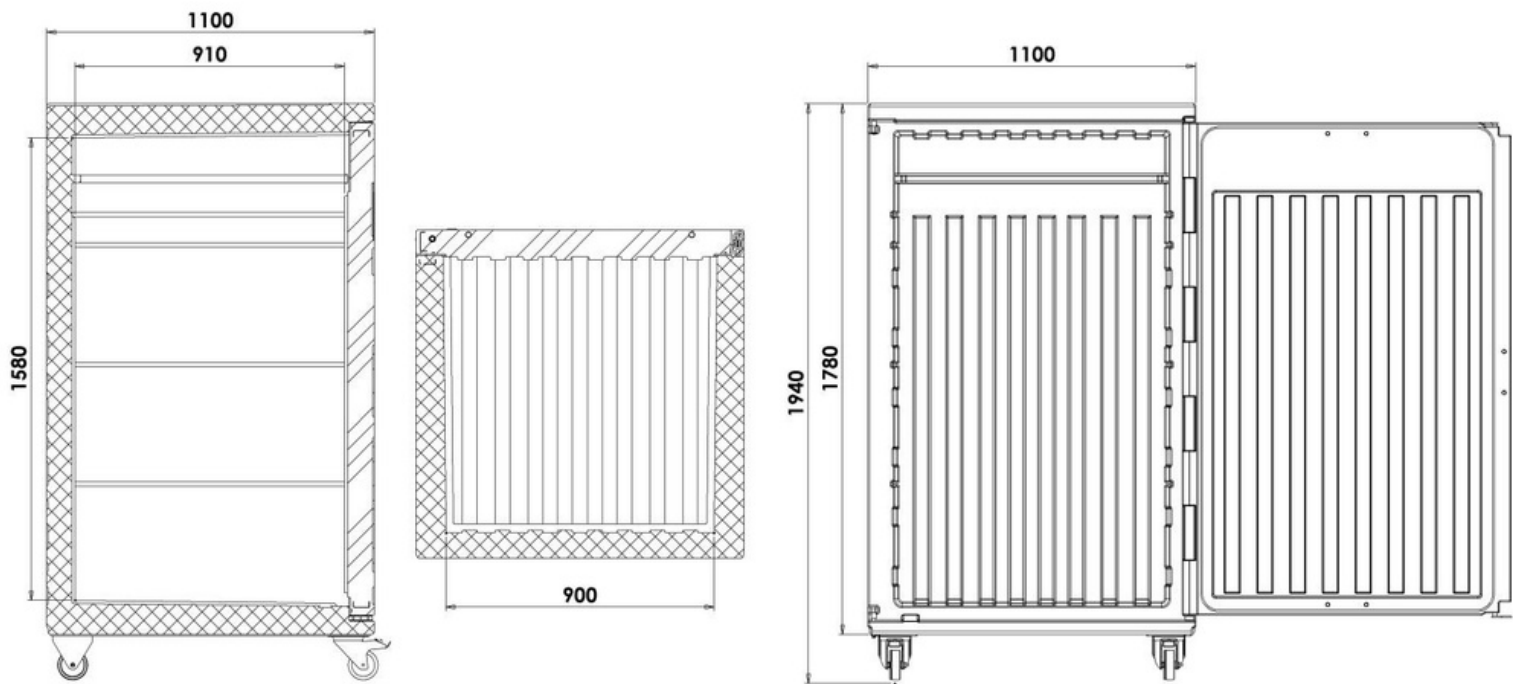

ACCESSORIES

MODEL	SKU	COLOR	DIM. EXT (mm)	WEIGHT (Kg)
Card holder	RR1244		B5	
Stainless steel grid	AEA024		935x890xh16	7
Eutectic plate Fresh +3°C -4xCargo	PE110001	rosa	835x353xh45	7,6
Eutectic plate Frozen - 21°C -4xCargo	PE110002	blu	835x353xh45	7,6
Eutectic plate Frozen Plus -21°C - 4xCargo	PE119008	verde	835x353xh45	7,6
USB Data Logger Range -30°C +70°C	AFG007		80x33xh14	
Floor/vehicle container fixing kit (for Basic version)	RR1223			
Eutectic plate retainer safety kit	RR1180			
Analog thermometer +40°C- 40°C	RR1165			