



CARGO 780



ATP

**INSULATED CONTAINER FOR THE
TRANSPORT OF TEMPERATURE
CONTROLLED PRODUCTS**



www.melform.com



- .Brand: MELFORM
- .Country of origin: ITALY
- .Customs code: 39231090
- .ATP certification
- .Compatible with food contact
- .Colour: grey/blue
- .Capacity: 780 litres.
- .Technology: rotomoulding
- .Warranty: 24 months
- .Fully recyclable at the end of its operating life.

CARGO 780

MANUFACTURING MATERIALS

- POLYETHYLENE:** inner and outer walls of container and door; suitable for food contact.
- POLYURETHANE:** insulating material between the walls of the container and the door, free of CFC and HCFC.
- SILICONE RUBBER:** gasket.
- STAINLESS STEEL:** handling handles, closing handle, internal door rod.
- GALVANIZED STEEL:** Hinge rods, hinge rod connection plates, wheel support.
- NYLON :** wheels
- POLYPROPYLENE :** Hinges

AVAILABLE MODELS

MODEL	SKU	EAN CODE	EXT. DIM. (mm)	INT. DIM. (mm)	CAPACITY (l)	WEIGHT (kg)
CARGO 780 Basic	07809002	8022949123192	800x1000xh1780	610x810xh1570	780	108
CARGO 780 With wheels	07800001	8022949058418	800x1000xh1950	610x810xh1570	780	112
CARGO 780 With feet	07800009	8022949147990	800x1000xh1900	610x810xh1570	780	112
CARGO 780 Fish transport version with wheels	07800013	8022949174200	800x1000xh1950	610x810xh1570	780	112

PRODUCT FEATURES



Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake).
Wheel support plate integrated in the container.



Alternatively, possibility of inserting 4 feet in galvanized steel h 120mm.



3 housing seats of grids positioned at 385/785/1185mm from the bottom of the container.



Fresh, frozen and frozen plus eutectic plates, to increase thermal maintenance performance over time




USB datalogger to record temperature data during transport



RFID systems for traceability




Handle prepared for the use of a tamper-evident system.




Stainless steel rod with 2 hooks integrated inside the door.



Stainless steel closing handle with release button.




Internal temperature controllable thanks to the thermometer that can be inserted into the door (on request)



Available version for transporting fish with expansion cap to allow the evacuation of the ice melt water of the fish



Easily removable door sealing gasket.



Door can be opened up to 270° with tongue door stopper



System of double pin hinges to improve stability of the door over time


K

Overall heat transfer coefficient:
K=0.31 W/m²K


°C

Guaranteed for use:
from -30° C to +100°C

ACCESSORIES FOR FISH TRANSPORT VERSION

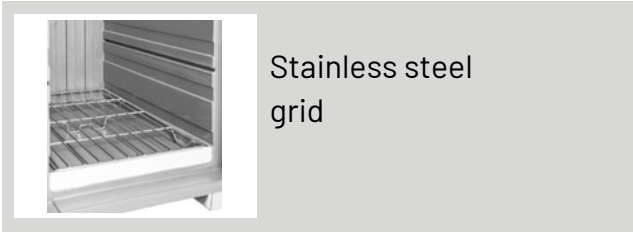

DIMENSIONAL DRAWING (mm)

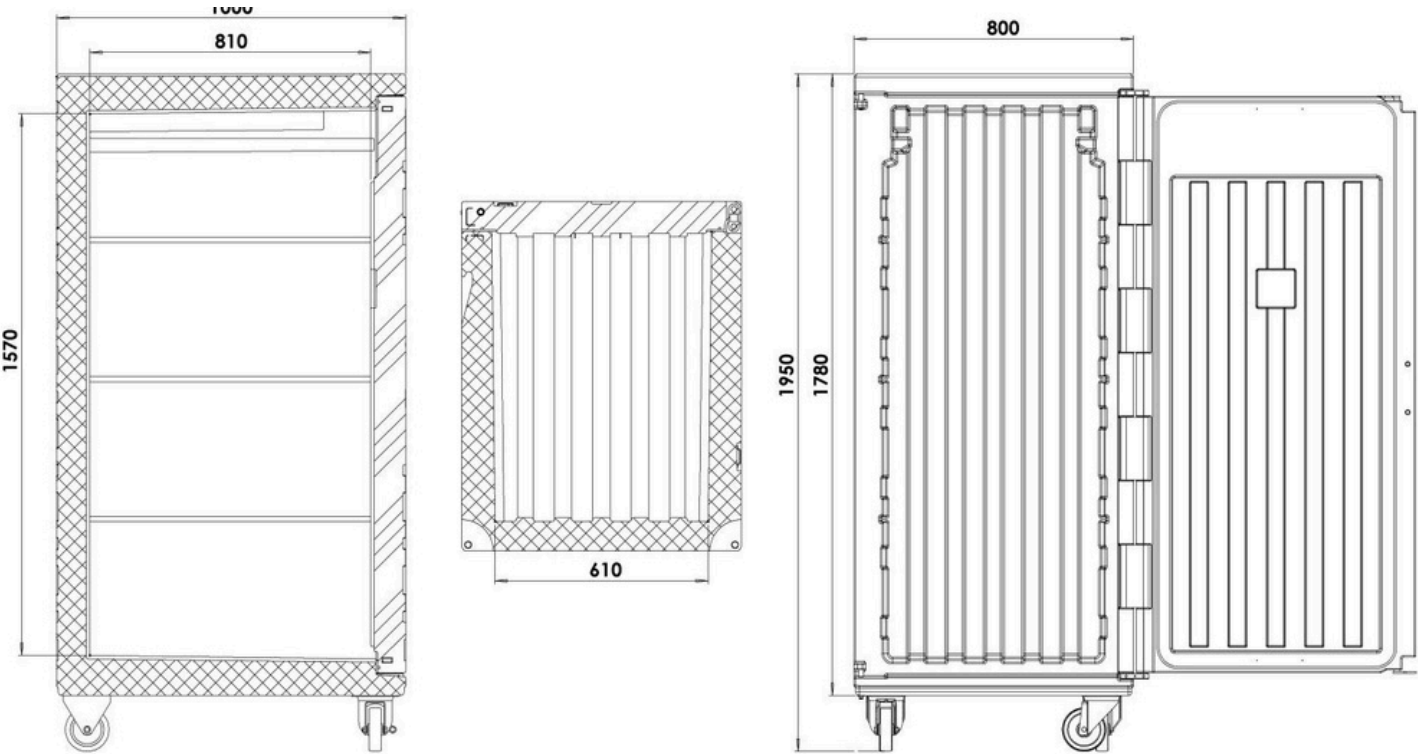

ACCESSORIES

MODEL	SKU	COLOR	DIM. EXT. (mm)	WEIGHT (kg)
Card holder	RRI141		A5	
Intermediate stainless steel grid	AEA019		647x790xh16	4,3
Stainless steel grid (for fish transport version)	AEA039			
Eutectic plate Fresh +3°C -2 x Cargo	PE500001	rose	540x325xh57	6,8
Eutectic plate Frozen -21°C -2 x Cargo	PE500002	blue	540x325xh57	6,8
Eutectic plate Frozen Plus -21°C -2 x Cargo	PE500908	green	540x325xh57	6,8
USB Data Logger Range -30°C+70°C	AFG007		80x33xh14	
Floor/vehiclecontainer fixing kit (for basic version)	RRI223			
Eutectic plate retainer safety kit	RRI180			
Analog thermometer +40°C -40°C	RRI165			