



DRICY 540



**INSULATED CONTAINER
FOR VERY LOW TEMPERATURES**



www.melform.com



DRICY 540

- Brand: MELFORM
- Country of origin: ITALY
- Customs code: 39231090
- Compatible with food contact
- Color: grey/blue
- Technology: rotomoulding
- Warranty: 24 months
- Fully recyclable at the end of its service life
- Low height from the ground for easy loading and picking
- Perfectly stackable, thanks to special lid housings
- Ideal for dry ice deliveries in applications such as fresh/frozen food distribution for e-commerce, home delivery, last mile, grape harvesting and thermoregulation in food processes
- Dricy containers are suitable for the containment of dry ice at a temperature of -78.5°C
- Containment capacity: 430 kg of dry ice pellets 3 mm
- Each plastic material is subject to embrittlement when subjected to extremely low temperatures; Consequently, it is recommended to avoid the use of metal objects for the removal of any residual dry ice remaining on the bottom of the container

MANUFACTURING MATERIALS

POLYETHYLENE : Inner and outer walls of the container and lid; Suitable for food contact. .

POLYURETHANE : insulating material between the walls of the container and the lid, free of CFCs and HCFCs.

SILICON RUBBER : gasket.




STAINLESS STEEL : closing hook, gas spring protection casing.

GALVANIZED STEEL : Hinge rod, reinforcement frame, feet.

AVAILABLE MODELS

MODEL	SKU	EAN CODE	DIM. EXT. (MM)	DIM. INT. (MM)	CAPACITY (L)	WEIGHT (KG)
Dricy 540 with wheels	0540S001	8022949151898	1100X1200XH900	920X1020XH578	540	102
Dricy 540 with pallet	0540S002	8022949153618	1100X1200Xh900	920x1020xh578	540	106


SCHÈMA DIMENSIONNEL

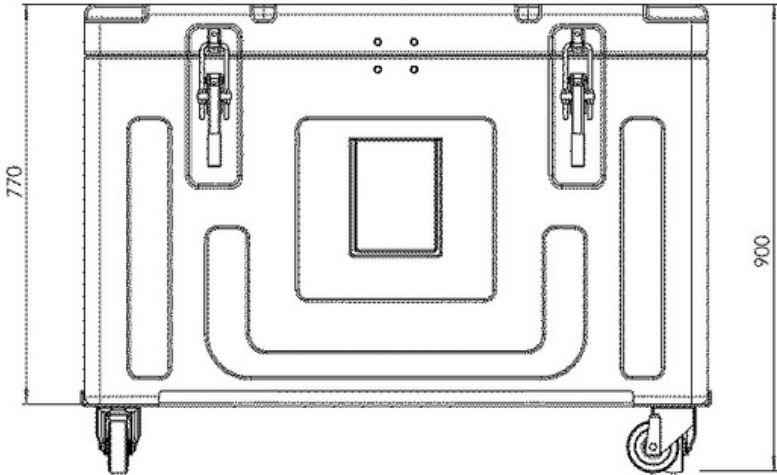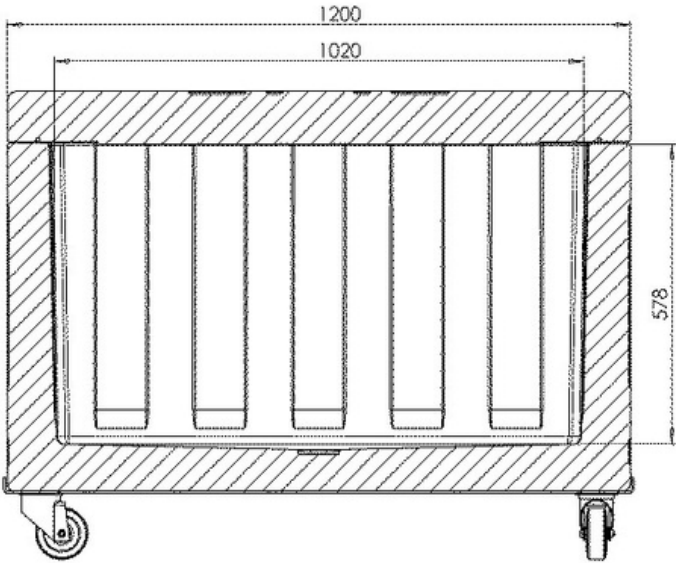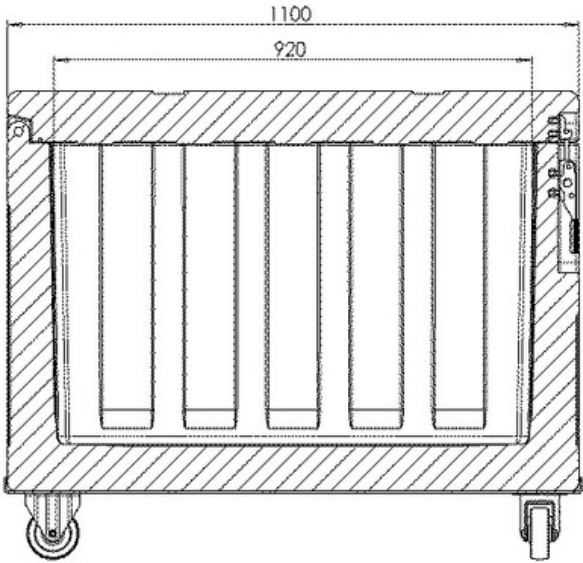

PRODUCT FEATURES



Double adjustable stainless steel closure with sealing eyelet.



Flat bottom without grooves to reduce product residues and with central drain.



Easily replaceable lid sealing gasket.



Hole for drainage of liquids placed on the bottom of the container.



Ergonomic handles inserted on the body to facilitate safe handling.



Dedicated housings for stacking containers.



Galvanized steel reinforcement frame.



Label holder for content or destination identification. Suitable for A5 format documents.



Version with 4 wheels (2 swivel and 2 swivel with brake).
Version with 4 galvanized steel feet mounted on support plates integrated into the container.



RFID systems for traceability



Monobloc structure, without edges, joints and welds. Insulation only with CFC and HCFC free polyurethane foam



Gas spring shock absorbers system to facilitate opening.



Gas spring protection systems in stainless steel.

Overall heat transfer coefficient: $K=0.29 \text{ W/m}^2\text{K}$

ACCESSORIES

MODEL	SKU	MATERIAL	WEIGHT (KG)
Spacer kit for 90° opening Dricy 360	RRI221	Nylon	0,1