Insulate	<mark>d co</mark> r	ntainer C	CAR	<b>GO 1</b>	000		3/3/202	23 rev0
80x120			Ċ	$\hat{\boldsymbol{\Sigma}}$	Ŗï	HACCP	A	TP
Insulated of temperature Brand: MELFORM Country of origin Customs code: 3 ATP Certificate Compatible with Color: melange Capacity: 1000 f External dimensi Technology: roto Warranty: 24 mo	re-con 4 1: ITALY 39231090 food contact grey/blue iters. iters. iters. iters. providing ponths	trolled	tran	sport (	of pro	ducts	at	
MANUFACTURIN								
Polyethylene		outer walls of contai suitable for food cor		Polyureth	ane	the walls	) material bet of the contai free of CFC a	ner and
Silicone rubber	gasket			Nylon		wheels		
Polypropylene	Hinges			Stainless	steel		handles, closi nternal door r	
Galvanized steel		, hinge rod connecti eel support	on					
Model Co	ode	EAN code		dim. m)	Int. (m		Capacity (I)	Weigh (kg)
Cargo 1000 100 with wheels	000001EU	8022949106805		00xh1940	605x101		1000	130
Cargo 1000 100 with feet	000010EU	8022949148102	800x12	00xh1900	605x101	5xh1550	1000	130
Cargo 1000 100 with pallet	000002EU	8022949107833	800x12	00xh1900	605x101	5xh1550	1000	155




## **PRODUCT FEATURES**

PRODUCT FEATURES		
	Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake). Wheel support plate integrated in the container.	Version on pallet with galvanized frame with six feet of h 120 mm. Version on 4 feet in galvanized steel h 120mm.
	4 housing seats of grids positioned at 385/785/1185/1250mm from the bottom of the container.	Intermediate grid with water collection tank.
	Stainless steel rod with 2 hooks integrated inside the door.	Handle prepared for the use of tamper-evident system.
	Fresh, frozen and frozen plus eutectic plates to increase thermal maintenance performance over time.	Safety retainer kit for eutectic plates.
	Specific version for transporting fish with expansion cap to allow the evacuation of the ice melt water of the fish.	Collect – drops for the ice melt water of the fish.
	Lower stainless steel grid.	Lower grid with breakwater system that limits the escape of water even when the container is open.
	Internal temperature controllable thanks to the thermometer that can be inserted into the door (on request).	System of double pin hinges to improved stability of the door over time.



tangerolat T T T T T T T T T T	USB datalogger to record temperature data during transport.	RFID	RFID systems for traceability
°C	Guaranteed for use: from -30°C to +100°C.	к	Overall heat transfer coefficient: K=0.33 W/m <sup>2</sup> K

## **TECHNICAL DATA (mm)**

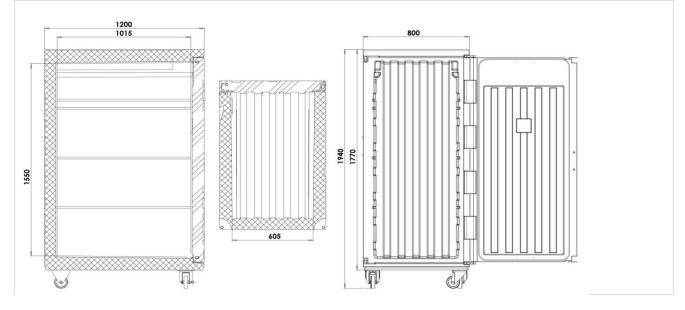

## ACCESSORIES

Model	Code	Color	External dimensions (mm)	Weight (kg)
Card holder	AMC101		173xh200	
Grid stainless steel	AEA023		647x990xh16	5
Intermediate grid	AEA026			
Grid collapsible stainless steel	AEA029		647x990xh25	6
Eutectic plate Fresh +3°C - 2 x Cargo -	PE900001	rose	600x487xh50	10
Frozen eutectic plate - 21°C - 2 x Cargo -	PE900002	blue	600x487xh50	10
Eutectic plate Frozen plus – 21°C - 2 x Cargo -	PE900908	green	600x487xh50	10
Data logger USB	AFG007			



FISH TRANSPORT CONFIGURATION			
Water drainage system	ASC011		
Basic grid stainless steel	AEA027		
Drip collector	3518		

