



CARGO 900



ATP

**INSULATED CONTAINER FOR THE
TRANSPORT OF PRODUCTS AT
TEMPERATURE - CONTROLLED.**



www.melform.com



CARGO 900

- Brand: MELFORM
- Country of origin: ITALY
- Customs code: 39231090
- ATP certification
- Compatible with food contact
- Colour: grey/blue
- Capacity: 900 litres.
- Technology: rotomoulding
- Warranty: 24 months
- Fully recyclable at the end of its operating life.


MANUFACTURING MATERIALS

- POLYETHYLENE:** inner and outer walls of container and door; suitable for food contact.
- POLYURETHANE:** insulating material between the walls of the container and the door, free of CFC and HCFC.
- SILICONE RUBBER:** gasket.
- STAINLESS STEEL:** handling handles, closing handle , inner door rod, corner door reinforcement .
- GALVANIZED STEEL:** wheel support.
- SILICON RUBBER :** gasket
- NYLON :** wheels

AVAILABLE MODELS

MODEL	SKU	EAN CODE	EXT. DIM. (mm)	INT. DIM. (mm)	CAPACITY (l)	WEIGHT (kg)
Cargo 900 Basic	09009101	8022949210625	800x1200xh1665	600x985xh1460	900	106,5
Cargo 900 with wheels	09000037	8022949102807	800x1200xh1835	600x985xh1460	900	111
Cargo 900 with feet	09009066	8022949122218	800x1200xh1790	600x985xh1460	900	111
Cargo 900 with pallet	09000074	8022949104238	800x1200xh1790	600x985xh1460	900	137
Cargo 900 with wheels fish transport version	09000073	8022949104085	800x1200xh1835	600x985xh1460	900	111

DIMENSIONAL DRAWING (mm)

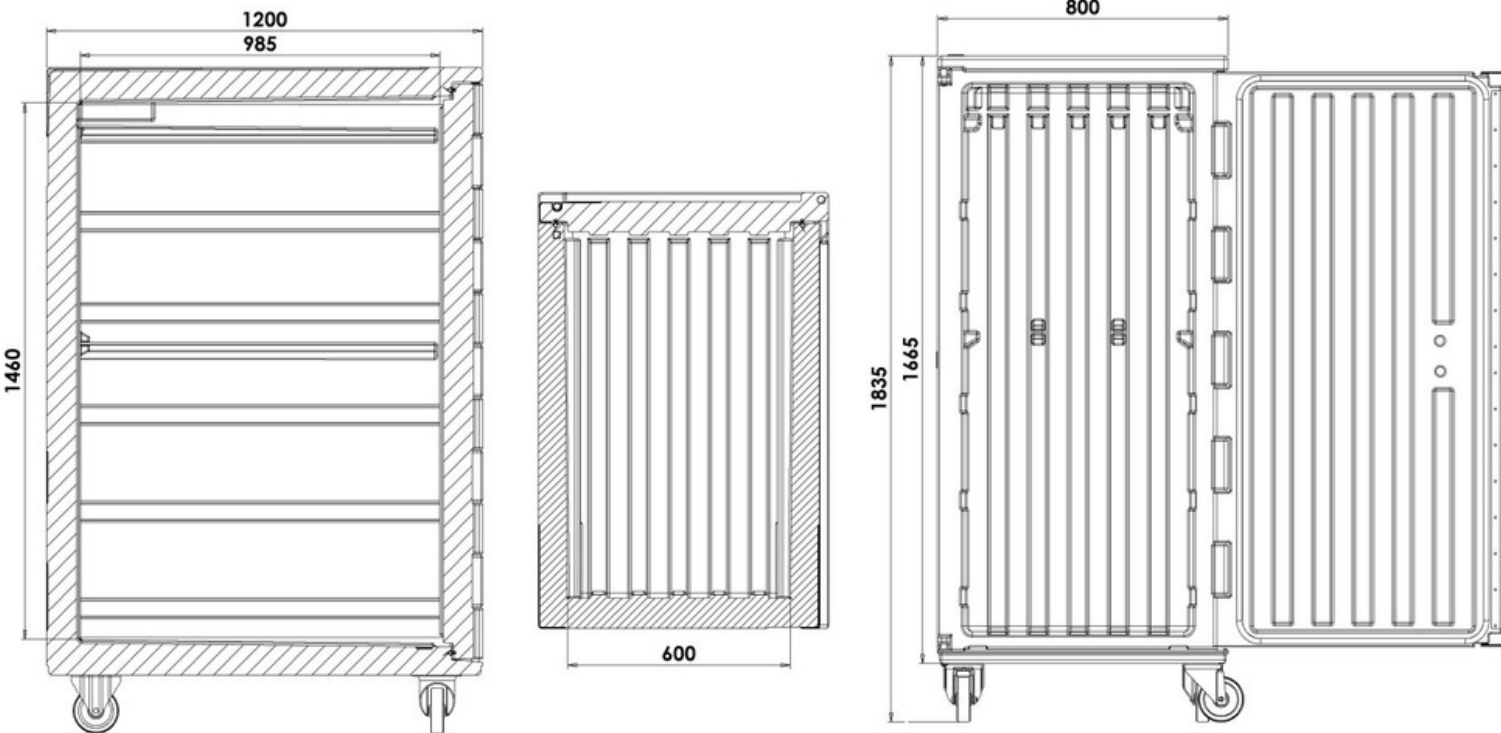

PRODUCT FEATURES



Prepared for the use of the cryogenic refrigeration system Cryo Power Box.




Stainless steel rod with 2 hooks.



Stainless steel grid for load sharing (on request)



Folding plastic grid (on request); it can be folded on the wall of the container when not in use.



Handle prepared for the use of tamper-evident system.



Version on pallet with galvanized steel frame at 6 feet of h 120 mm. As an alternative, available in version on 4 feet in galvanized steel h 120mm.




Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake). Wheel support plate integrated in the container.



Easily removable door sealing gasket.




Fish transport version: Expansion cap to allow the evacuation of the ice melt water of the fish.



Internal grooves to grant proper air circulation.



Stainless steel reinforcement on the door to ensure greater strength and stability.



Door can be opened up to 270° with a tab-type door.



Fresh, frozen and frozen plus eutectic plates are available to increase thermal maintenance performance over time.



Safety retainer kit for eutectic plates.



RFID systems for traceability



Available (on request) USB datalogger to record temperature data during transport.

K

Overall heat
transfer
coefficient:
K=0.33 W/m²K

°C

Guaranteed for use:
from -30°C to +100°C.

ACCESSORIES FOR FISH TRANSPORT VERSION



Bottom stainless steel grid



Drip tray to collect the
melt water of the ice
of the fish

ACCESSORIES

MODEL	SKU	COLOR	DIM. EXT. (mm)	WEIGHT kg)
Card holder	RR1141		A5	6,2
Stainless steel grind	AEA010		625x970xh16	1,9
Plastic folding grid	PAPE0003	rose	604x923xh20	
Eutectic plate Fresh +3°C - 2 x Cargo -	PE900001	blue	600x487xh50	10
Eutectic plate Frozen - 21°C - 2 x Cargo -	PE900002	green	600x487xh50	10
Eutectic plate Frozen Plus - 21°C - 2 x Cargo	PE900908		600x487xh50	10
USB Data Logger Range -30°C +70°C	AFG007		80x33xh14	
Floor/vehicle container fixing kit	RR1223			
Eutectic plate retainer safety kit	RR1180			
Base stainless steel grid (for fish transport version)	AEA027		600x975xh76	6,3
Drip collector (for fish transport version)	3518			7,5
Analog thermometer +40°C- 40°C	RR1165			